



## Precision Pulse Control

The Mini-5 is a compact and lightweight pulsed current source designed to drive laser diodes, bars, arrays, or any low-impedance load. The key specifications are output current from 0.5 A to 5 A, rise and fall times below 8  $\mu$ s at 5 A, pulse widths from 25  $\mu$ s to 8,750  $\mu$ s, forward voltage from 0 V to 48 V, and pulse repetition rate from single shot to 10,000 Hz.

## System Operation

The Mini-5 output current may be set with an internal potentiometer or an analog voltage. The pulse width is controlled with the input trigger signal.

The system requires two DC voltages for operation, 12 V and compliance voltage equal to 12 V above the laser diode's forward voltage.

## Output Cable

The laser or load is connected to the Mini-5 with 22 AWG twisted pair cable (included) with a length of 15 cm (6 inches) or less.

## What is included?


- Mini-5**
- Mini-5 Pulser
  - DC Input Cable
  - Output Cable
  - Control Signal Cable

## Mini-5 Development Kit


This development kit includes everything in the Mini-5 (listed above) plus everything required to send single shot pulses from 25  $\mu$ s to 8,750  $\mu$ s to a laser with a forward voltage up to 12 V. It allows current amplitude and pulse width control via USB computer control or a color touch screen.

## Ordering Information


- Mini-5 Development Kit
- Mini-5

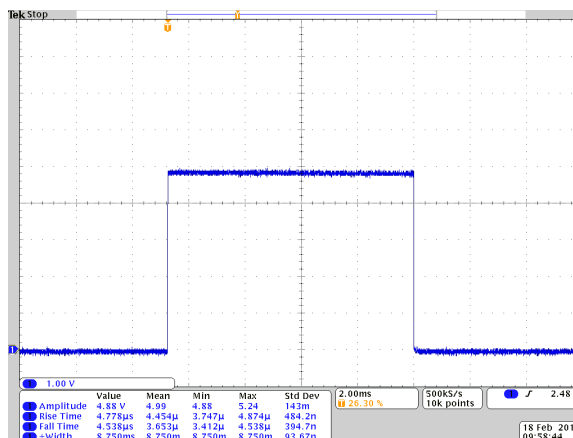

5 A, 17.0 V compliance, 20 Hz, 8,750  $\mu$ s pulse width

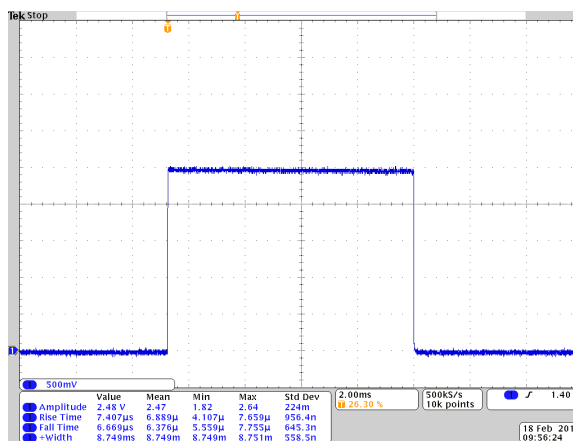

2.5 A, 14.0 V compliance, 20 Hz, 8,750  $\mu$ s pulse width

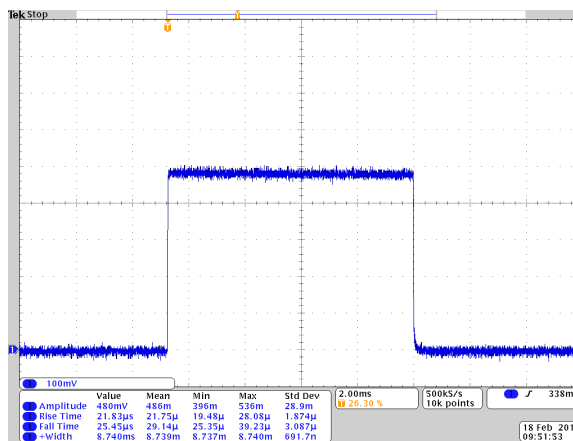

0.5 A, 12.5 V compliance, 20 Hz, 8,750  $\mu$ s pulse width



## Pulse Amplitude

Output Current Range	0.5 A to 5 A
Setpoint Accuracy	±1 % of full scale current
Current Overshoot	< 0.1 %
Current Rise/Fall Time	$\leq 40 \mu\text{s}$ : 0.25 A $\leq$ current setpoint $\leq$ 0.50 A $\leq 30 \mu\text{s}$ : 0.50 A $\leq$ current setpoint $\leq$ 0.75 A $\leq 25 \mu\text{s}$ : 0.75 A $\leq$ current setpoint $\leq$ 1.0 A $\leq 20 \mu\text{s}$ : 1.0 A $\leq$ current setpoint $\leq$ 1.5 A $\leq 15 \mu\text{s}$ : 1.5 A $\leq$ current setpoint $\leq$ 2.0 A $\leq 12 \mu\text{s}$ : 2.0 A $\leq$ current setpoint $\leq$ 3.5 A $\leq 8 \mu\text{s}$ : 3.5 A $\leq$ current setpoint $\leq$ 5 A

Polarity	Positive
Forward Voltage	0 V to 48 V

## Trigger (J1-Pin 6)

Frequency Range	$\leq 10,000 \text{ Hz}$ * See SOA graphs on next page
Input Voltage Levels	0 V, output off 5 V, output on
Termination impedance	1000 $\Omega$
Trigger pulse width	25 $\mu\text{s}$ to 8,750 $\mu\text{s}$
Delay (external to output)	$\leq 1 \mu\text{s}$ (typical)

## Current Setpoint Control (J1-Pin 4)

Input Voltage Levels	5 V or open : internal potentiometer control 0 V : external control
Termination impedance	9,000 $\Omega$
Response time on change	$\leq 0.5 \mu\text{s}$

## Analog Current Setpoint (J1-Pin 5)

Input Voltage Levels	0 V to 2.0 V 0.0 V = 0 A output 2.0 V = 5 A output
Termination impedance	90,000 $\Omega$
Response time on change	$\leq 0.5 \mu\text{s}$

## Current Monitor

Current monitor	0 V to 0.500 V 5 A output current = 0.500 V (typical)
Current monitor termination	50 $\Omega$
Current monitor connector	SMB

## Control Signal Connector (J1)

Connector	Molex # 70553-0110
	Pin 1: 12 V DC
	Pin 2: 12 V return
	Pin 3: 12 V return
	Pin 4: Current setpoint control
	Pin 5: Analog current setpoint
	Pin 6: Trigger

## Output Connector (J6)

Connector	Molex # 22-12-2024
	Pin 1: Out +
	Pin 2: Out -

## 12 V Power Specifications (J1-Pin 1)

Voltage requirements	12 V DC $\pm$ 5%
Current requirements	0.100 A

## DC Input Connector (J2)

Connector	Molex # 22-12-2024
	Pin 1: DC +
	Pin 2: DC -

## DC Input Power Specifications

Voltage requirements	forward voltage + 12 V DC $\pm$ 5% <sup>*1</sup>
Voltage Range	12 V DC to 60 V DC
Current requirements	5.0 A

<sup>\*1</sup> Operation of instrument outside of this voltage can cause permanent damage to the instrument and/or load.

## General

Size (HxWxD)	11.3 cm x 12.65 cm x 5.4 cm (4.425" x 4.975" x 2.125")
Weight	0.5 kg (16 oz)
Mounting hole diameter	4.5 mm (0.180")
Mounting hole placement	3.49 cm x 11.6 cm (1.375" x 4.575")
Operating Temperature	10°C to 40°C
Cooling	Convection air cooled

## Notes

Warranty—One year parts and labor on defects in materials and workmanship.

The Mini-5 current source meets or exceeds these specifications.

All specifications are measured with 10 cm of 22 AWG twisted pair wire connecting the Mini-5 to a low impedance/inductance load (HPL-2400-1.00).

Specifications subject to change without notice.

Document 7675-0009 Rev A6 - 6 May 2014

